

## TPM | TPM PE | TPM INOX

*The ideal "fellow worker"*

 Capacity (kg): 2000 - 2500 - 3000  Lifting Height (mm): 200

### TPM

The ideal assistant for simple and quick handling of palletized goods in confined spaces. The rigid frame, reliable hydraulic pump made from aluminum, and wheels with easy rolling bearings assure agility and stability.



*Additional rollers make inserting and removal from the pallet nearly effortless.*



*3-position (lowering - neutral - lifting) control lever in the steering arm.*



### TPM INOX

A fully stainless steel version can be used in environments with high humidity, dust and corrosive chemicals.



### TPM PE

An optional load cell based weighing system installed in the forks has a digital display to save the operator time and effort.



## HAND PALLET TRUCKS

Features in detail: \_\_\_\_\_



#### REDUCED FORKS:

Forks reduced to only 51mm thickness for special pallets that are characterised by a reduced forking gap.



#### LONGER FORKS:

Longer forks up to 1500 mm, 1800 mm and 2000 mm; shorter forks to 800 mm and 1000 mm.



#### SHAPED FORKS:

Custom forks are available for handling rolls and coils with various diameters.

## TPM 10 GAL 12V | TPM 10 GAL

*Stacker Pallet Truck*

 Capacity (kg): 1000  Lifting Height (mm): 800

### TPM 10 GAL 12V

A full lift pallet truck with 12V battery powered electric lift, the TPM is a versatile handling solution. The scissor lift mechanism raises the load to 800 mm from the floor. The TPM GAL is simple, stable and ergonomic. Use it as a work bench or to support assembly lines.



### TPM 10 GAL

A simpler, more economical version of the TPM GAL with hand operated hydraulic lift.



## HAND PALLET TRUCKS

Features in detail: \_\_\_\_\_



#### BUTTONS:

Push buttons for lifting and lowering are built into the steering arm.



#### STABILIZERS:

Foot guard and rear stabilizers to assure maximum stability.



#### BATTERY CHARGER:

12V, 15A battery charger built-in into the machine frame.




## TPM

| model |    | TPM 2500 | TPM 3000 | TPM FRUTTA |
|-------|----|----------|----------|------------|
| Q     | Kg | 2500     | 3000     | 2500       |
| C     | mm | 600      | 600      | 600        |
| I     | mm | 1150     | 1150     | 1150       |
| L     | mm | 1545     | 1545     | 1545       |
| L2    | mm | 395      | 395      | 395        |
| M     | mm | 540      | 540      | 685        |
| N     | mm | 160      | 160      | 160        |
| Ø     | mm | 200      | 200      | 200        |

| model |    | TPM 2000/1500 | TPM 2000/1800 | TPM 2000/2000 |
|-------|----|---------------|---------------|---------------|
| Q     | Kg | 2000          | 2000          | 2000          |
| C     | mm | 750           | 900           | 1000          |
| I     | mm | 1500          | 1800          | 2000          |
| L     | mm | 1895          | 2195          | 2395          |
| L2    | mm | 395           | 395           | 395           |
| M     | mm | 540           | 540           | 540           |
| N     | mm | 160           | 160           | 160           |
| Ø     | mm | 200           | 200           | 200           |

### STANDARD EQUIPMENT

- Strong steel frame • Steel lifting pump • Steel lever system • Entering rollers
- Lifting by manual pump • Steering lever with 3 positions • Manual traction

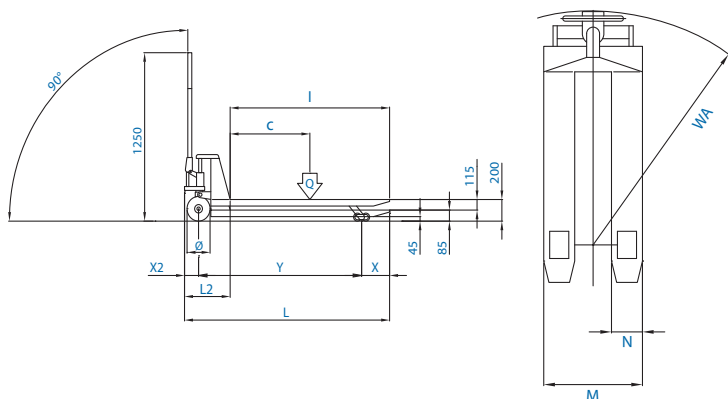


## TPM 10 GAL

| model |    | TPM 10 GAL |
|-------|----|------------|
| Q     | Kg | 1000       |
| C     | mm | 600        |
| I     | mm | 1150       |
| L     | mm | 1545       |
| X     | mm | 215        |
| X2    | mm | 135        |
| Y     | mm | 1195       |
| L2    | mm | 395        |
| M     | mm | 520        |
| N     | mm | 180        |
| Ø     | mm | 150        |
| h1    | mm | 85         |
| h3    | mm | 800        |

### STANDARD EQUIPMENT

- Manual traction • Steel lifting pump • Lifting by manual pump
- Steering lever with 3 positions • Forks lifting mm. 800

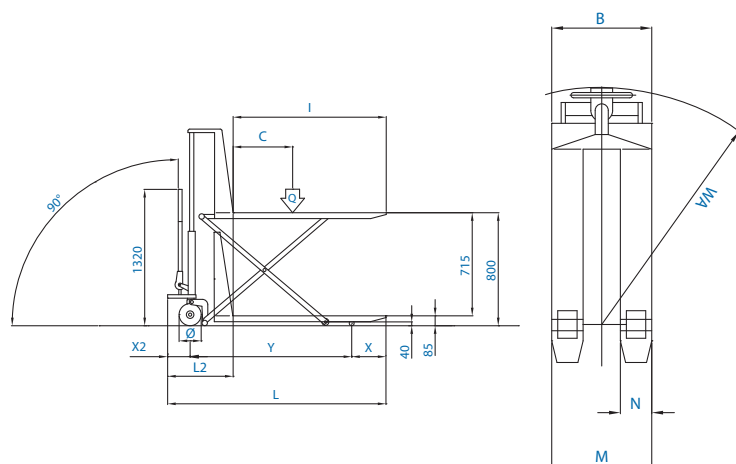

## TPM 10 GAL 12V

| model |    | TPM 10 GAL 12V |
|-------|----|----------------|
| Q     | Kg | 1000           |
| C     | mm | 600            |
| I     | mm | 1150           |
| L     | mm | 1640           |
| X     | mm | 180            |
| X2    | mm | 145            |
| Y     | mm | 1315           |
| L2    | mm | 490            |
| M     | mm | 520            |
| N     | mm | 160            |
| Ø     | mm | 160            |
| h1    | mm | 85             |
| h3    | mm | 800            |

### STANDARD EQUIPMENT

- Manual traction • 12V Electric lifting • Battery 12V 110AH (12V 155 Ah on request)
- Built-in electronic battery charger 24V 15A with microprocessor • Forks lifting mm. 800 • Emergency stop button • Exhausted battery warning-indicator • Forks control by push-buttons • Electric end stroke • Anti-crushing safety micro by steering • Foot protection on rear wheel

